

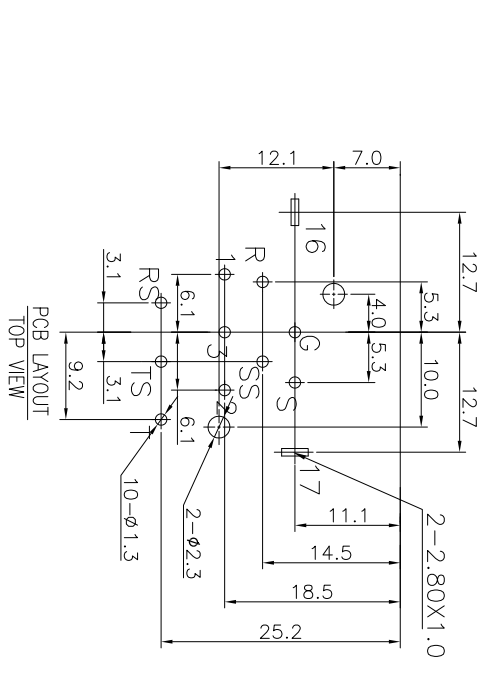


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

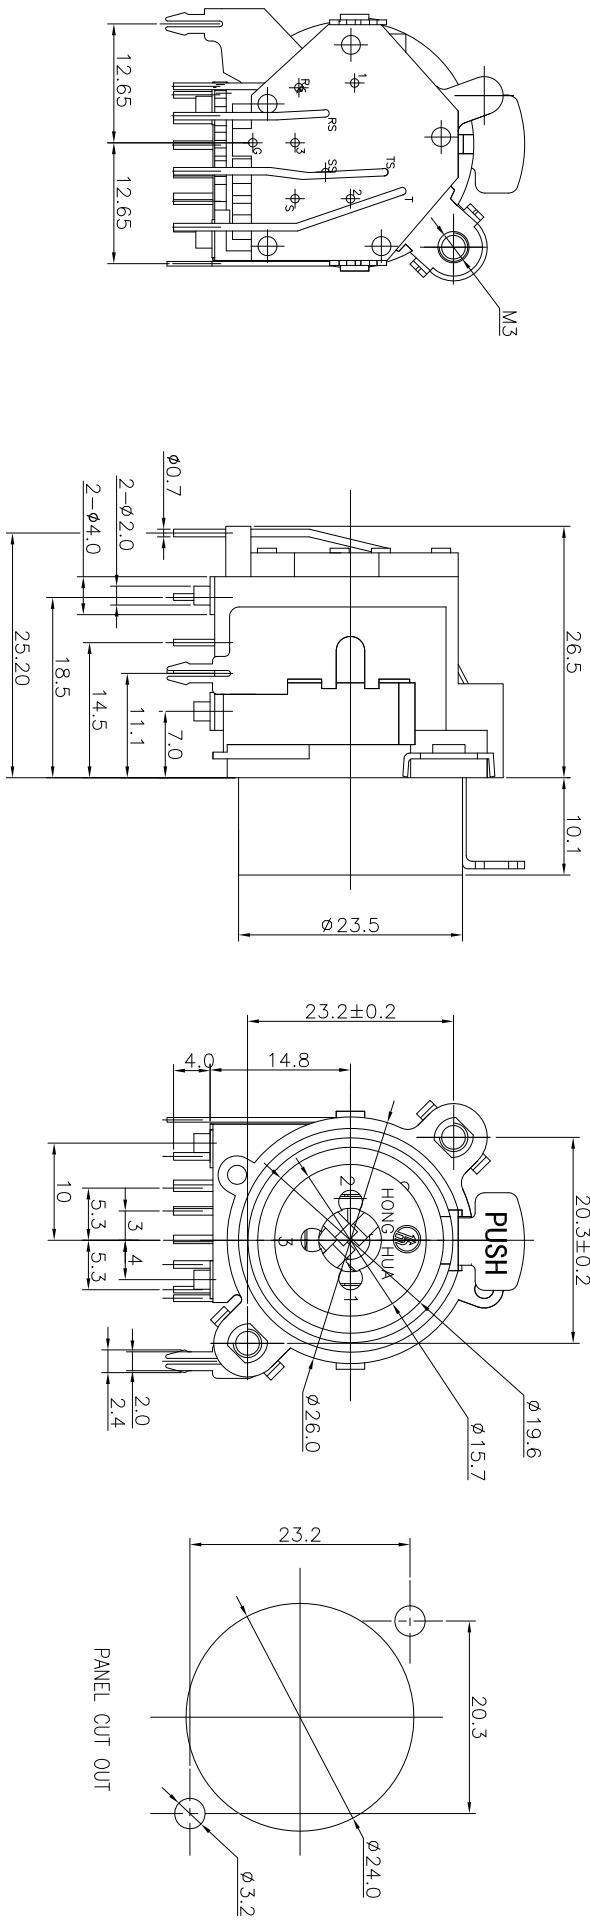

NOTES:  
 ELECTRICAL:  
 1: RATED CURRENT: 7.5 A MAX.  
 2: RATED VOLTAGE: 50 V AC.  
 3: CONTACT RESISTANCE: XLR: 30 MILLIOHMS MAX. JACK: 30 MILLIOHMS MAX.  
 4: INSULATION RESISTANCE: 1 G OHMS MIN.  
 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.  
 MECHANICAL:  
 1: INSERTION FORCE: 5N~40N  
 2: WITHDRAWAL FORCE: 5N~40N.  
 4: DURABILITY: 1000 CYCLES.  
 ENVIRONMENTAL:  
 TEMPERATURE RANGE: -30°C TO 80°C.

ANGLE	±5°	MODEL NAME:	SPC-03B-10P	 广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.	
63 < L	±0.5	(PART NO.)			
16 < L ≤ 63	±0.4	DESIGN:	X.H.Wang 09/19'18	TITLE:	XLR CABLE CONNECTORS
4 < L ≤ 16	±0.3	FINISH:	See table	DWG NO.:	
L ≤ 4	±0.2	MAT'L:	See table	UNIT:	mm
TOL TABLE:		Q'TY: /	APPROVED: X.Q.Hu 09/19'18	VIEW:	SCALE: 5:1
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				SHEET:	1/1
				SIZE:	A3