

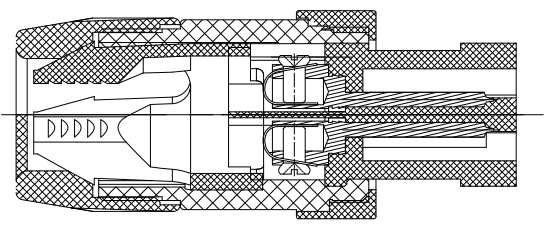
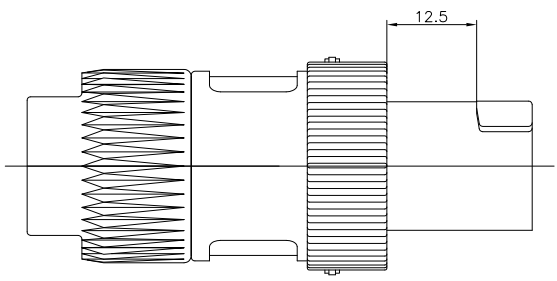


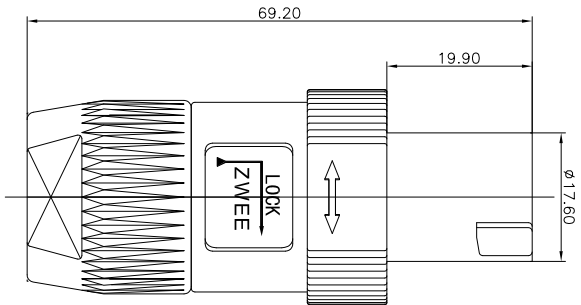

REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	



NOTES:  
 ELECTRICAL:  
 1: RATED CURRENT: XLR: 20 A MAX JACK: 15 A MAX  
 2: RATED VOLTAGE: XLR: 250 V AC JACK: 250 V AC  
 3: CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
 4: INSULATION RESISTANCE: 1 G OHMS MIN.  
 5: DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC MIN.  
 MECHANICAL:  
 1: INSERTION FORCE: 5N~20N  
 2: WITHDRAWAL FORCE: 5N~20N.  
 4: DURRABILITY: 1000 CYCLES.

ANGLE	±5°	MODEL NAME: PLE4-01 (PART NO.)	 <b>广东正宝科技有限公司</b> GUANGDONG TRENPPO TECHNOLOGY CO. LTD.
63 < L	±0.5	MAT'L: See table	
16 < L ≤ 63	±0.4	FINISH: See table	
4 < L ≤ 16	±0.3	Q'TY: /	
L ≤ 4	±0.2	APPROVED: X.Q.Hu 09/19'18	
TOL TABLE:		DESIGN: X.H.Wang 09/19'18	TITLE: PLE PLUG
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO. LTD. NO PART HEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		CHECKED: L.W.Wu 09/19'18	DWG NO.:
UNIT: mm	VIEW: 	SCALE: 5:1	SHEET: 1/1
			REV: A
			SIZE: A3