
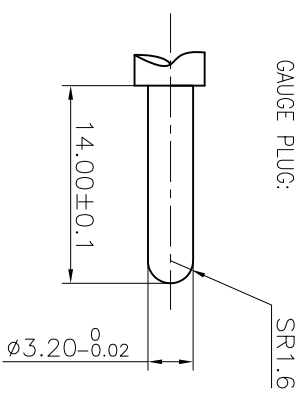
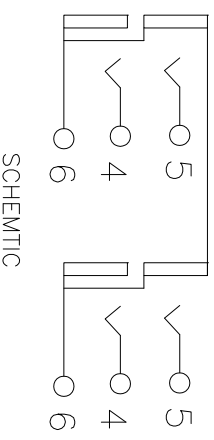
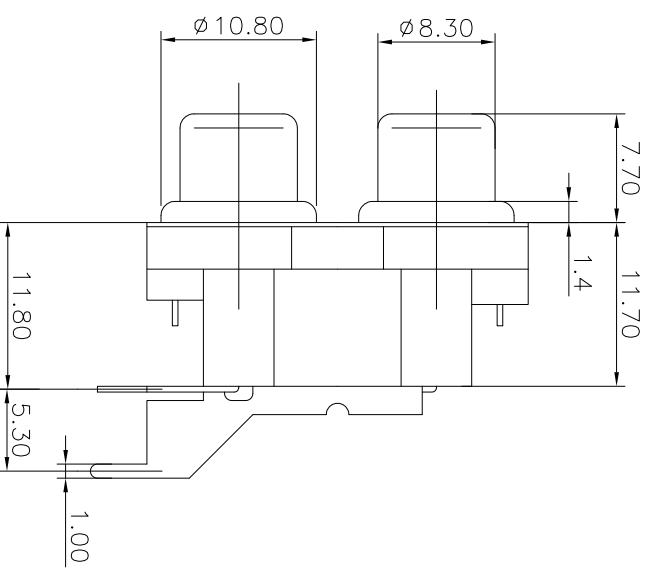
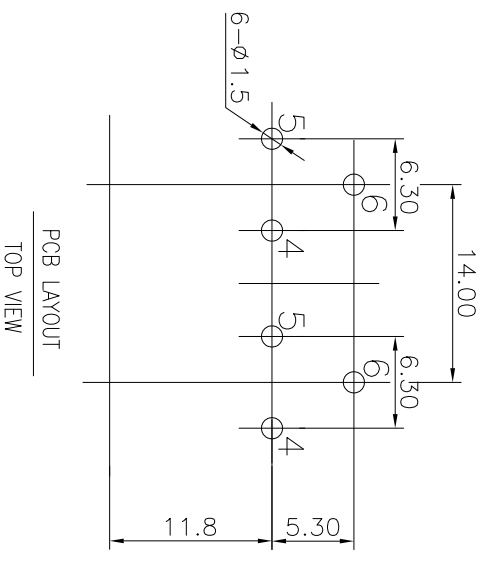


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

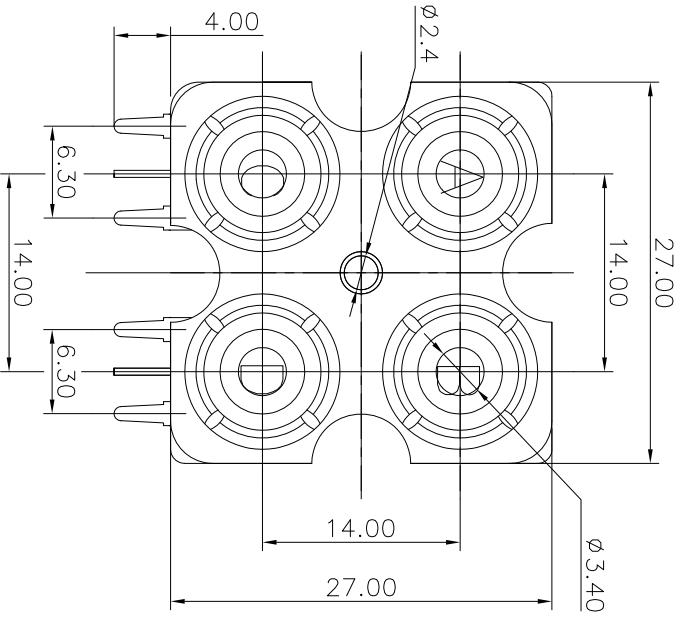

- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
 - 2: RATED VOLTAGE: 50V AC.
 - 3: CONTACT RESISTANCE: 30 MILLIOHMS Max.
 - 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
 - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
 - 2: WITHDRAWAL FORCE: 3N-30N.
 - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

ANGLE	±5°	MODEL NAME: RCA-407P	 广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.
63 < L	±0.5	(PART NO.)	
16 < L ≤ 63	±0.4		
4 < L ≤ 16	±0.3		
L ≤ 4	±0.2		
TOL TABLE:		MAT'L:	
THIS DOCUMENT IS THE PROPERTY OF		FINISH:	
TRENPPO TECHNOLOGY CO., LTD. NO PART		Q'TY: /	
HEREOF MAY BE REPRODUCED AND		APPROVED: X.Q. Hu	
USED WITHOUT THE PRIOR WRITTEN		DATE: 11/02'18	
CONSENT OF THE OWNER		UNIT: mm	
		VIEW: 5:1	
		SCALE: SHEET: 1/1	
		SIZE: A3	
		REV.: A	
		DWG NO.: RCA PIN JACK	
		CHECKED: L.W.Wu	
		DESIGN: X.H.Wang	
		DATE: 11/02'18	