




PCB LAYOUT  
TOP VIEW



SCHEMATIC

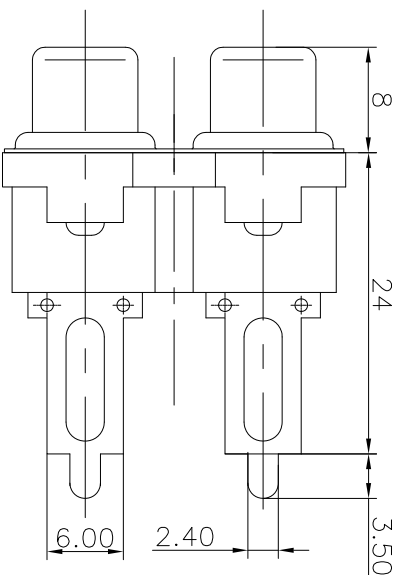

GAUGE PLUG: SR1.6

- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
  - 2: RATED VOLTAGE: 50V AC.
  - 3: CONTACT RESISTANCE: 30 MIILOHMS Max.
  - 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
  - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
  - 2: WITHDRAWAL FORCE: 3N-30N.
  - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

ANGLE	±5°
63 < L	±0.5
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

TOL TABLE:

THIS DOCUMENT IS THE PROPERTY OF  
TRENPRO TECHNOLOGY CO., LTD. NO PART  
HEREOF MAY BE REPRODUCED AND  
USED WITHOUT THE PRIOR WRITTEN  
CONSENT OF THE OWNER

MODEL NAME: RCA-407F/P (PART NO.)	TITLE: RCA PIN JACK	
DESIGN: X.H.Wang 11/15'18	CHECKED: L.W.Wu 11/15'18	DWG NO.:
MAT'L: See table	FINISH: See table	Q'TY: /
APPROVED: X.Q.Hu 11/15'18	UNIT: mm	VIEW: 5:1
SCALE: SHEET: 1/1	SIZE: A3	REV.: A

广东正宝科技有限公司  
GUANGDONG TRENPRO TECHNOLOGY CO., LTD.

REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	