


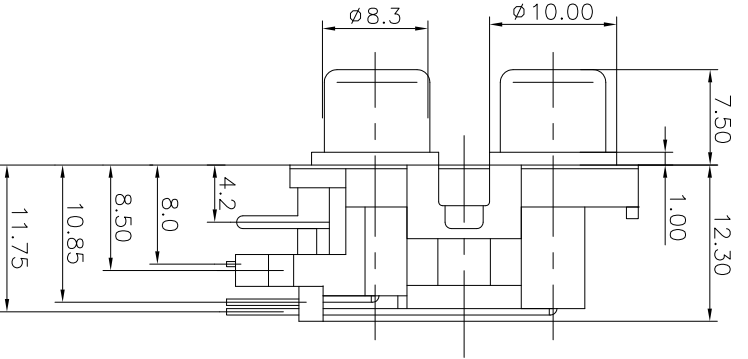
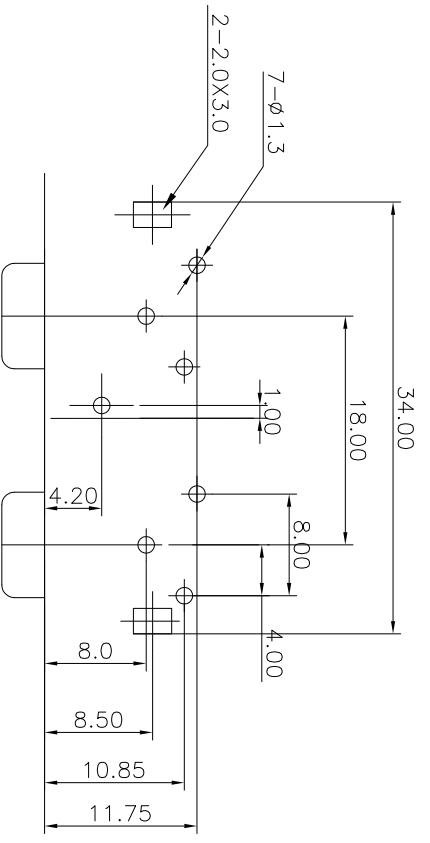


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

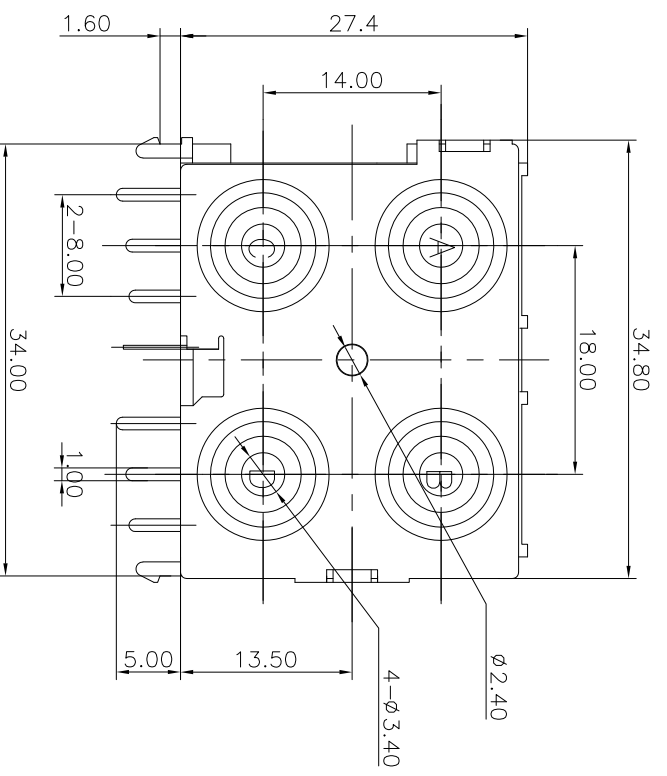

GAUGE PLUG: SR1.6



- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
  - 2: RATED VOLTAGE: 50V AC.
  - 3: CONTACT RESISTANCE: 30 MILLIOHMS Max. AFTER TESTING: 100 MILLIOHMS Max.
  - 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
  - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
  - 2: WITHDRAWAL FORCE: 3N-30N.
  - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

ANGLE	±5°	MODEL NAME: RCA-409P	<p>广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.</p>	<p>REV.: A</p>
63 < L	±0.5	(PART NO.)		
16 < L ≤ 63	±0.4	MAT'L:	<p>DESIGN: X.H.Wang 11/15'18</p> <p>TITLE: RCA PIN JACK</p>	<p>SCALE: SHEET: 5:1 1/1</p>
4 < L ≤ 16	±0.3	FINISH:		
L ≤ 4	±0.2	See table	<p>CHECKED: L.W.Wu 11/15'18</p> <p>DWG NO.:</p>	<p>UNIT: mm</p> <p>VIEW:</p>
TOL TABLE:		See table	<p>APPROVED: X.Q.Hu 11/15'18</p>	<p>SIZE: A3</p>
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER.		Q'TY: /		