


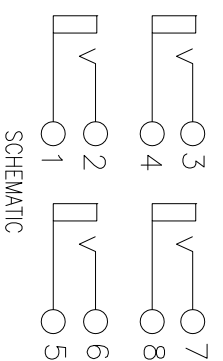
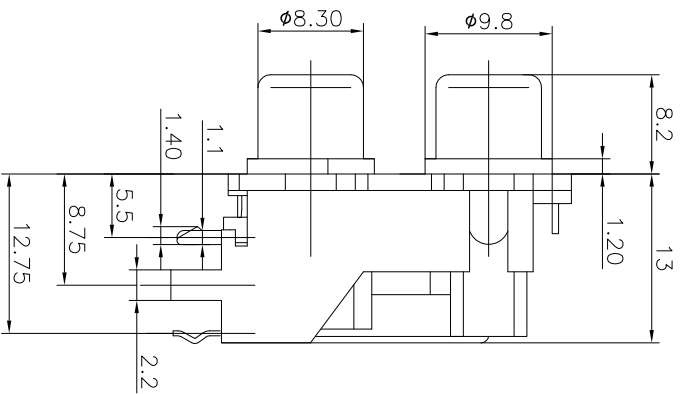


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

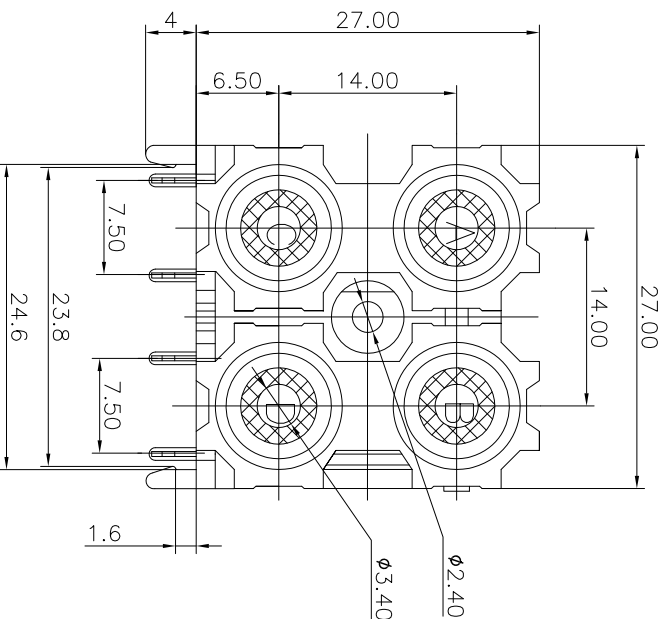

NOTES:  
 ELECTRICAL:  
 1: RATED CURRENT: 0.2A Max.  
 2: RATED VOLTAGE: 50V AC.  
 3: CONTACT RESISTANCE: 30 MILLIOHMS Max.  
 AFTER TESTING: 100 MILLIOHMS Max.  
 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.  
 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.  
 MECHANICAL:  
 1: INSERTION FORCE: 3N-30N.  
 2: WITHDRAWAL FORCE: 3N-30N.  
 3: DURABILITY: 100 CYCLES.  
 ENVIRONMENTAL:  
 TEMPERATURE RANGE: -20°C TO 60°C.

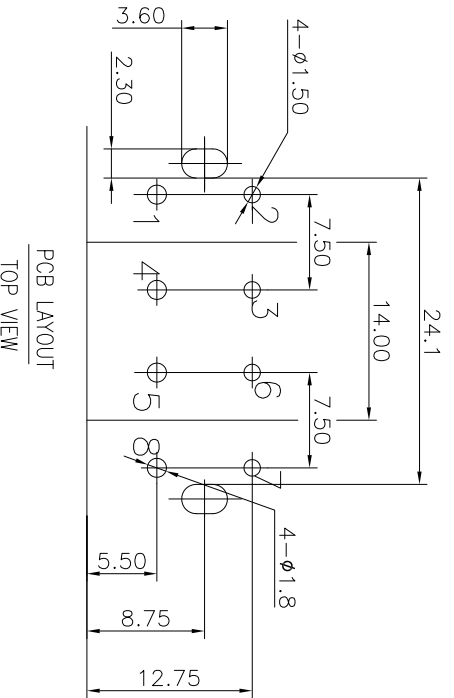

ANGLE	±5°	MODEL NAME: RCA-413F	MAT'L:	DESIGN: X.H.Wang	11/15'18	TITLE:	RCA PIN JACK	REV.:	A
63 < L	±0.5	(PART NO.)	FINISH:	CHECKED: L.W.Wu	11/15'18	DWG NO.:		UNIT:	mm
16 < L ≤ 63	±0.4		QTY: /	APPROVED: X.Q.Hu	11/15'18	VIEW:	SCALE: 5:1	SHEET:	1/1
4 < L ≤ 16	±0.3							SIZE:	A3
L ≤ 4	±0.2								

TOL TABLE:  
 THIS DOCUMENT IS THE PROPERTY OF  
 TRENPRO TECHNOLOGY CO., LTD. NO PART  
 THEREOF MAY BE REPRODUCED AND  
 USED WITHOUT THE PRIOR WRITTEN  
 CONSENT OF THE OWNER

广东正宝科技有限公司  
 GUANGDONG TRENPRO TECHNOLOGY CO., LTD.