
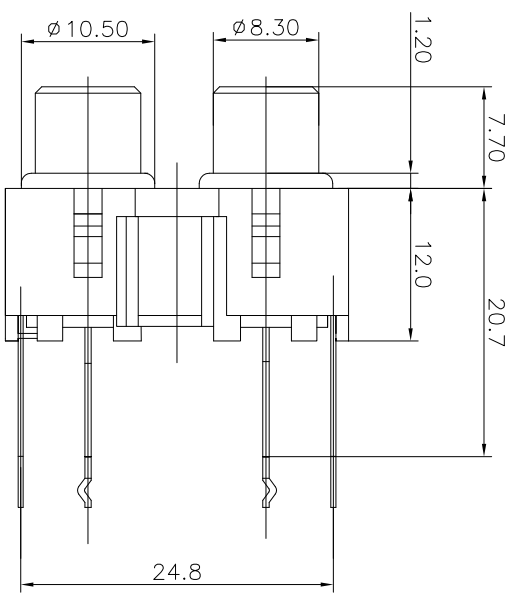


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

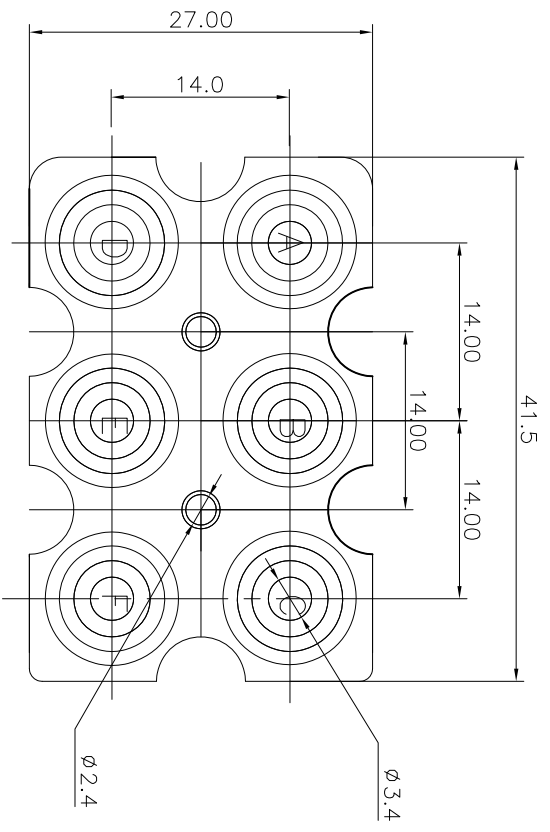

NOTES:

ELECTRICAL:



- 1: RATED CURRENT: 0.2A Max.
- 2: RATED VOLTAGE: 50V AC.
- 3: CONTACT RESISTANCE: 30 MILLIOHMS Max.
- 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
- 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:


- 1: INSERTION FORCE: 3N-30N.
- 2: WITHDRAWAL FORCE: 3N-30N.
- 3: DURABILITY: 100 CYCLES.

ENVIRONMENTAL:

TEMPERATURE RANGE: -20°C TO 60°C.

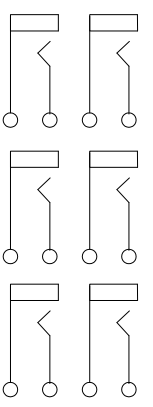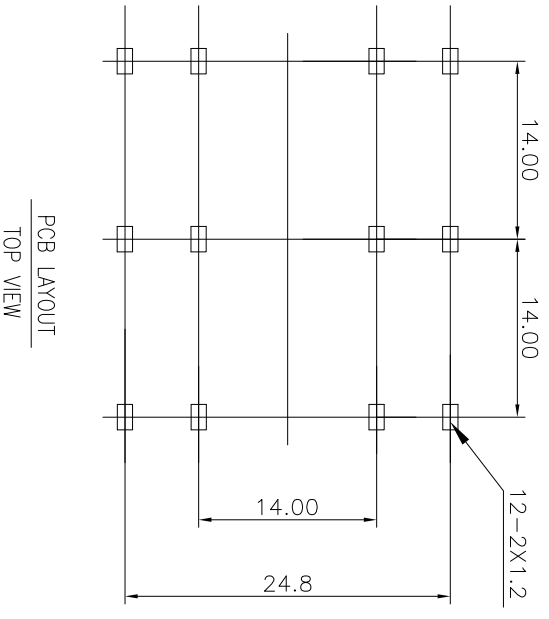

SCHEMATIC

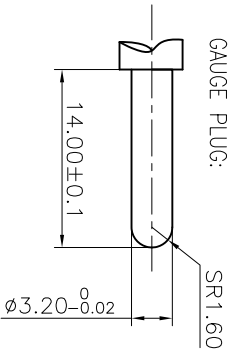

ANGLE	$\pm 5^\circ$	MODEL NAME: RCA-606F	 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO., LTD.
63 < L	± 0.5	(PART NO.)	
16 < L ≤ 63	± 0.4		
4 < L ≤ 16	± 0.3	MAT'L:	DESIGN: Z.F.Lion
L ≤ 4	± 0.2	FINISH:	CHECKED: L.W.Wu
TOL TABLE:		See table	DATE: 11/29'18
THIS DOCUMENT IS THE PROPERTY OF		See table	TITLE: RCA PIN JACK
TRENPRO TECHNOLOGY CO., LTD. NO PART		Q'TY: /	DWG NO.:
HEREOF MAY BE REPRODUCED AND		APPROVED: X.Q.Hu	UNIT: mm
USED WITHOUT THE PRIOR WRITTEN		DATE: 11/29'18	SCALE: 5:1
CONSENT OF THE OWNER		DATE: 11/29'18	SHEET: 1/1
			SIZE: A3