

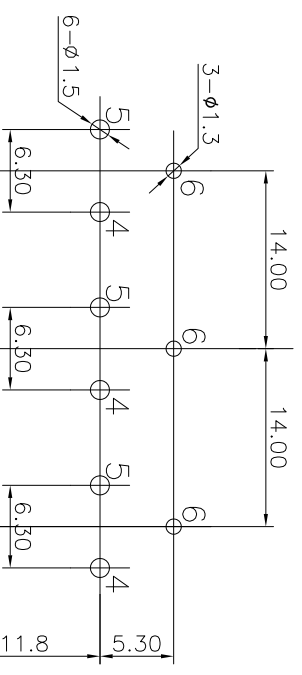
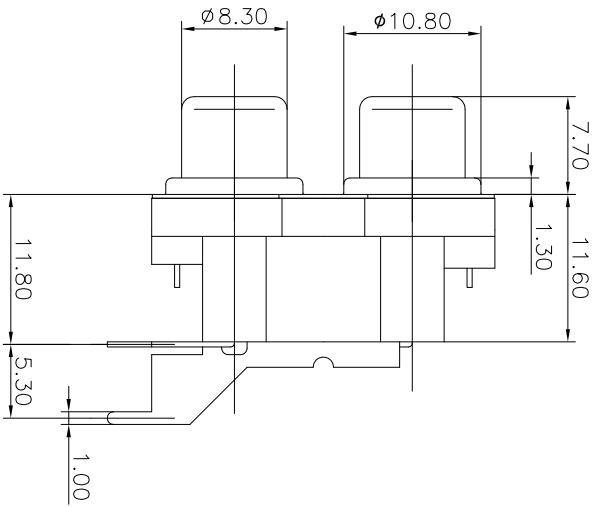



| | | | |
|------|---------|---------------|----------|
| REV. | ECN NO. | MODIFIED MARK | APPROVED |
| A | | FIRST RELEASE | |

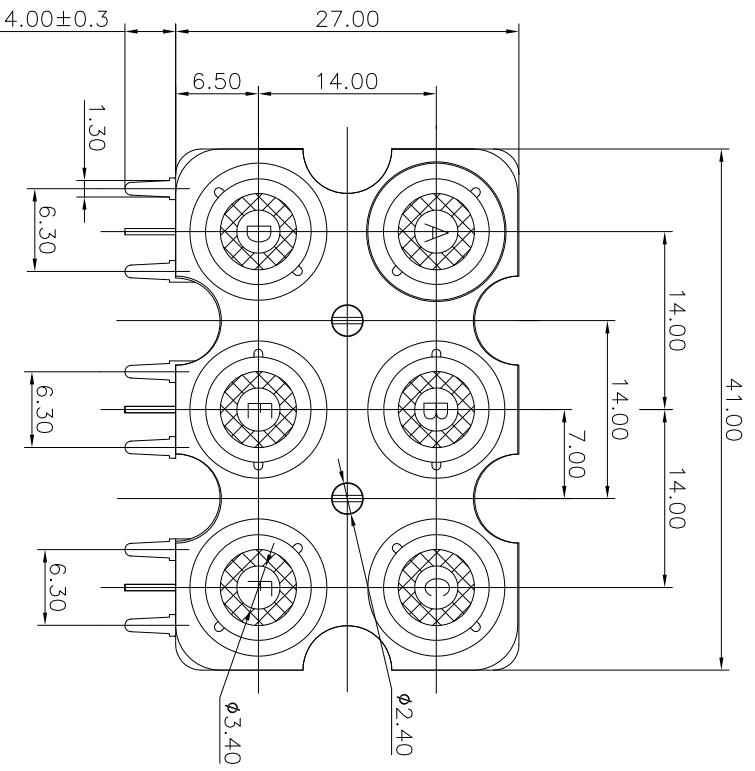

PCB LAYOUT
TOP VIEW

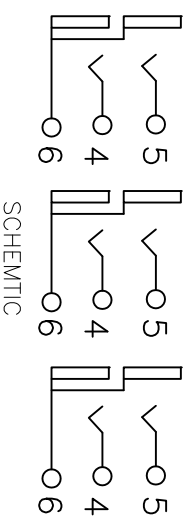

SCHEMATIC



GAUGE PLUG:

- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
 - 2: RATED VOLTAGE: 50V AC.
 - 3: CONTACT RESISTANCE: 30 MILLIOHMS Max.
 - 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
 - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
 - 2: WITHDRAWAL FORCE: 3N-30N.
 - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

| | | | |
|---|-------------------|----------------------|--|
| ANGLE | ±5° | MODEL NAME: RCA-607P | 广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD. |
| 63 < L | ±0.5 | (PART NO.) | |
| 16 < L ≤ 63 | ±0.4 | | |
| 4 < L ≤ 16 | ±0.3 | | |
| L ≤ 4 | ±0.2 | | |
| TOL TABLE: | | MAT'L: See table | TITLE: RCA PIN JACK |
| THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER | | FINISH: See table | DWG NO.: |
| Q'TY: / | APPROVED: X.Q. Hu | CHECKED: L.W. Wu | DESIGN: Z.F. Lion |
| | 11/29'18 | 11/29'18 | 11/29'18 |
| | UNIT: mm | VIEW: 5:1 | SCALE: SHEET: 1/1 |
| | REV.: A | | SIZE: A3 |